


ProTek U-Bolts



ProTek U-Bolts combine the strength and simplicity of a u-bolt with our advanced polymer technology. They successfully restrain the pipe while shielding it from metal-to-metal contact and rough abrasion from pipe movement. The ProTek coating is strong enough to withstand high compressive loads and harsh environmental conditions, but has a low coefficient of friction to seamlessly cradle the pipe.

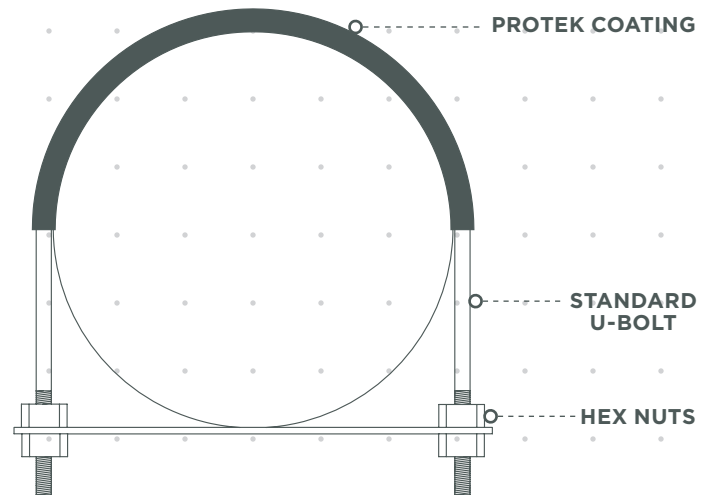

BENEFITS

- » Eliminates metal to metal contact that could damage pipe coatings and lead to corrosion
- » Coating has a low coefficient of friction to allow pipe movement
- » Low cost of installation
- » Product helps minimize maintenance and operational costs throughout the lifetime of the piping system
- » Can be used on any type of pipe.

SPECIFICATIONS

COMPOSITION	APP-CLPM
TENSILE STRENGTH (ASTM D412)	1,500 lbs. per square inch
TEMPERATURE RANGE	-67°F to 230°F
INSTALLATION	Four heavy hex nuts
POTENTIAL ACCESSORIES	ProTek Package (ProTek Wear Pad and ProTek Flat Plate)
CUSTOM MANUFACTURING	Available in custom sizes and metal finishes including stainless steel.